


HELIOS MODULE SERIES

N-HJT HIGH EFFICIENCY MONO BM12-15B-G

620-640W

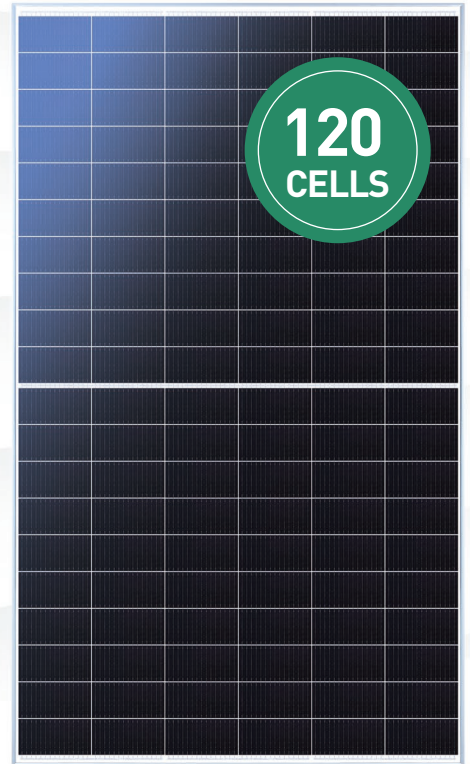

NEXT GENERATION OF MAINSTREAM MODULE EXCELLENT POWER GENERATION PERFORMANCE

- ◆ 210mm wafer with SMBB cell technology
- ◆ Up to 85% bifaciality and up to 30% additional power generation
- ◆ Competitive high-temperature performance with ameliorated temperature coefficient (-0.24%/°C)
- ◆ Better weak illumination response of HJT technology leads higher power generation

MORE ENVIRONMENTALLY FRIENDLY


- ◆ Lower carbon emissions

CONSISTENT RELIABILITY

- ◆ Zero Light Induced Degradation
- ◆ Industry-leading cell technology of TCO thin film contributes to excellent anti-PID characteristic

SHORTER PAYBACK TIME

- ◆ Lower BoS cost ensure a better LCOE

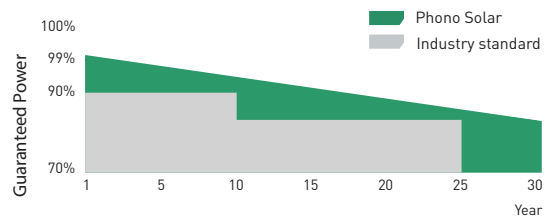

15-year Product Warranty

30-year Linear Performance Warranty

MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001:2015 / Quality management system

ISO 14001:2015 / Standards for environmental management system

ISO 45001:2018 / International standards for occupational health & safety



Bloomberg Tier¹
NEW ENERGY FINANCE



ELECTRICAL TYPICAL VALUES

Model	PS620M13GFH-20/USH		PS625M13GFH-20/USH		PS630M13GFH-20/USH		PS635M13GFH-20/USH		PS640M13GFH-20/USH	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (Pmpp)	620	472	625	476	630	480	635	484	640	487
Rated Current (Imp)	16.13	13.03	16.17	13.06	16.21	13.09	16.25	13.12	16.29	13.15
Rated Voltage (Vmpp)	38.44	36.25	38.66	36.45	38.87	36.65	39.08	36.85	39.29	37.05
Short Circuit Current (Isc)	17.14	13.84	17.17	13.87	17.20	13.89	17.23	13.91	17.26	13.94
Open Circuit Voltage (Voc)	44.90	42.74	45.09	42.93	45.27	43.10	45.45	43.27	45.63	43.44
Module Efficiency (%)	21.91		22.08		22.26		22.44		22.61	

STC(Standard Testing Conditions):Irrandance 1000W/m², AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C , Spectra at AM1.5, Wind at 1m/S

BIFACIAL ELECTRICAL VALUES

5%	Maximum Power (W)	645	650	655	660	666
	Module Efficiency (%)	22.78	22.97	23.15	23.33	23.52
15%	Maximum Power (W)	694	700	706	711	717
	Module Efficiency (%)	24.54	24.73	24.93	25.13	25.33
25%	Maximum Power (W)	744	750	756	762	768
	Module Efficiency (%)	26.29	26.50	26.71	26.92	27.14

MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline 210 x 105mm
Dimension (Lx W x H)	Length: 2172mm (85.51 inch)
	Width: 1303mm (51.30 inch)
	Height: 35mm (1.38 inch)
Weight	35.3kg (77.82 lbs)
Glass	2.0mm/2.0mm toughened glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm ² (IEC), (+):450mm,(-):250mm or Customized Length
Junction Box	IP 68 Rated

TEMPERATURE RATINGS

Voltage Temperature Coefficient	-0.22%/°C
Current Temperature Coefficient	+0.047%/°C
Power Temperature Coefficient	-0.24%/°C
Tolerance	0~+5w
NOCT	45±2°C
Bifaciality	80±5%




ABSOLUTE MAXIMUM RATING

Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	35A
PV Module Classification	Class II
Maximum System Voltage	DC 1500V

PACKING CONFIGURATION

Container	40' HQ
Pieces/Container	558

ELECTRICAL CHARACTERISTICS

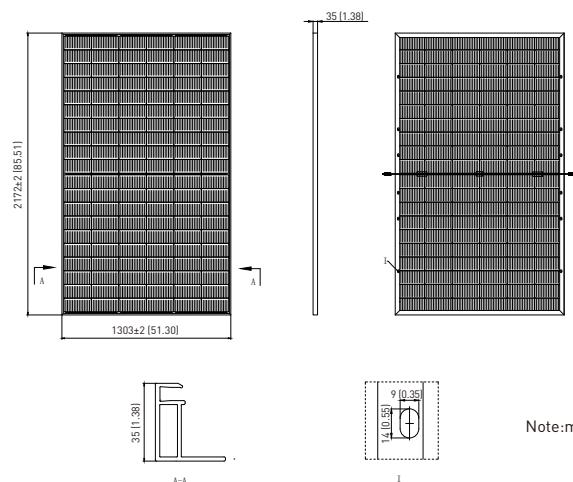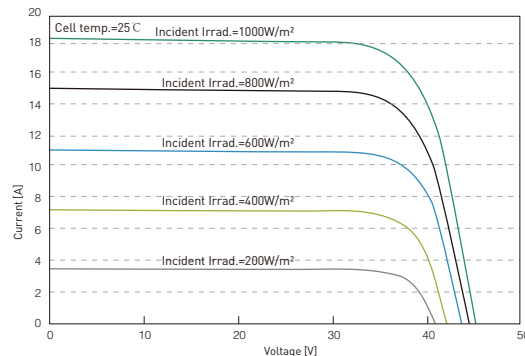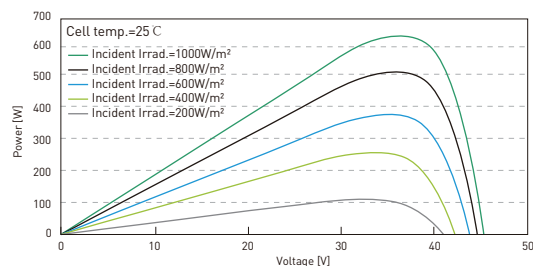

Note:mm (inch)